




Diamantne krožne žage

Oblika jedra diamantne krožne žage

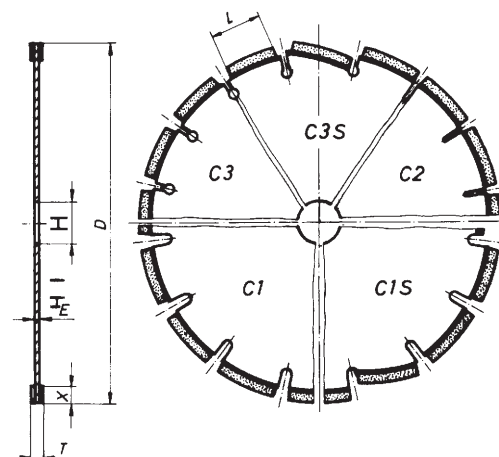

Potrebne navedbe pri naročanju
IDENT D – T – X – H specifikacija sestave
Primer naročila C1 300 – 2,4 – 5 – 25,4 AS

Tabela dimenzij

Premer (mm)	Dimenzije segmentov (mm)			Število segmentov		H (mm)
	L	T	X	C1, C1S	C2, C3, C3S	
300	40	2,4	5; 7; 10	18	21	Po naročilu
350	40	2,8	5; 7; 10	21	25	
400	40	3,2	5; 7; 10	24	28	
450	40	3,6	5; 7; 10	26	32	
500	40	3,6	5; 7; 10	30	36	
550	40	4,4	5; 7; 10	32	40	
600	40	4,4	5; 7; 10	36	42	
700	40	5,0	5; 7; 10	40	50	
800	40	5,5	5; 7; 10	46	57	
900	24	6,5	5; 7; 10	64		
1000	24	7,0	5; 7; 10	70		
1200	24	7,5	5; 7; 10	80		

Področje uporabe	Oblika žage	Specifikacija sestave	Obodna hitrost (m/s)
Asfalt	C1, C1S	AS	35-40
Sveži beton	C3, C3S	SVB	30-50
Sveži beton z armaturo	C3	SVB-A	30-40
Stari beton	C3	STB	30-40
Stari beton z armaturo	C3	STB-A	30-50
Marmor	C2	M	30-40
Granit	C2	G	25-40
Šamot trdi	C2, C3	ST	30-45
Šamot mehki	C2, C3	SM	40-50
Salonit	C3	SAL	30-45

Za posamezne materiale (granit, marmor) izdelamo žago tudi v tihi izvedbi – oznaka SIC2 (SIC3).
Poleg izdelave novih izdelkov v Swaty-ju diamantne žage, diamantne krone in gaterske liste tudi obnavljamo.

